


MOTOR CONNECTOR IS JST mod. EHR-4/
EHR-6 A 4 / 6 POLES FEMALE.
FOR CONNECTION USE JST mod. B4B-EH-A/
B6B-EH-A MALE CONNECTOR.

Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - 546 - 55500
BASIC STEP ANGLE			1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)		0.2
UNIPOLAR CURRENT	(Amp)		
RESISTANCE	(Ohm)		37.5
INDUCTANCE	(mH)		52
BIPOLAR HOLDING TORQUE	(Ncm)		12.5
UNIPOLAR HOLDING TORQUE	(Ncm)		
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)		20
THEORETICAL ACCELERATION	(rad x sec. ⁻²)		63000
BACK E.M.F.	(V/Krpm)		47
MASS	(Kg)		0.2
LEADS CODE			V

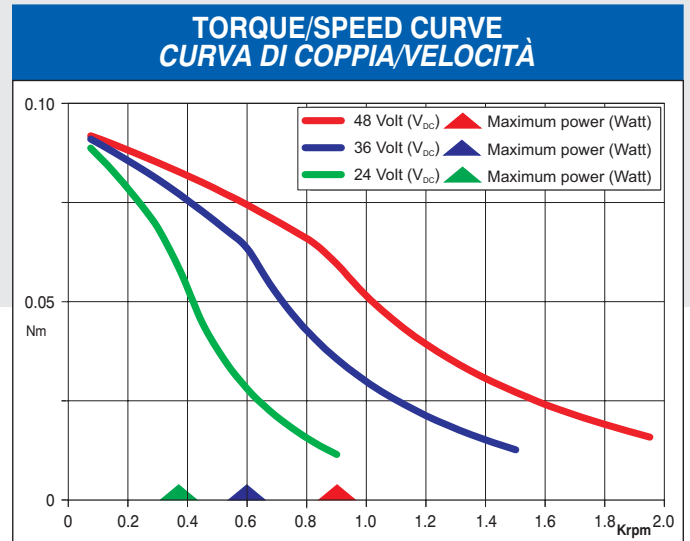

Suggested driver: contact R.T.A.

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)