


MOTOR CONNECTOR IS JST mod. EHR-6A
6 POLES FEMALE.
FOR CONNECTION USE JST
mod. B6B-EH-A MALE CONNECTOR.

Dimensions in mm.

| FEATURES CARATTERISTICHE | | MODEL MODELLO | 103 - H548 - 04500 |
|-----------------------------|---|------------------|--------------------|
| BASIC STEP ANGLE | | | 1.8° ± 0.09° |
| BIPOLAR CURRENT | (Amp) | | 0.9 ^(*) |
| UNIPOLAR CURRENT | (Amp) | | 1.2 |
| RESISTANCE | (Ohm) | | 3 |
| INDUCTANCE | (mH) | | 4.3 |
| BIPOLAR HOLDING TORQUE | (Ncm) | | 37 |
| UNIPOLAR HOLDING TORQUE | (Ncm) | | 27 |
| ROTOR INERTIA | (Kg ^m ² x 10 ⁻⁷) | | 53 |
| THEORETICAL ACCELERATION | (rad x sec. ⁻²) | | 66000 |
| BACK E.M.F. | (V/Krpm) | | 17 |
| MASS | (Kg) | | 0.28 |
| LEADS CODE | | | IV |

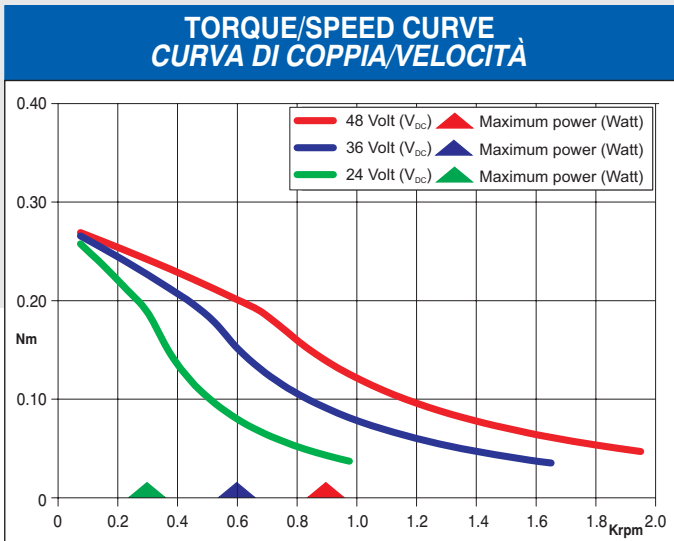

^(*) Bipolar series connection.
^(*) Collegamento bipolare serie.

ORANGE / ARANCIO ●

WHITE / BIANCO ●

BLUE / BLU ●

RED / ROSSO ●

BLACK / NERO ●

YELLOW / GIALLO ●

IV

SANYO DENKI CO., Ltd (JAPAN)
R.T.A. s.r.l. PAVIA (ITALY)