

LOW COST SLIP CLUTCH



FEATURES

ACCURATE TORQUE

The drag torque is produced by means of a hysteresis principle. This allows for constant torque levels and eliminates the possibility of high break away torque that occurs with typical friction devices

STABLE TORQUE

A consistent torque is maintained because of the hysteresis principle and is consistent within allowable speed range.

LONG OPERATIONAL LIFE

Permanent magnets and magnetic particles transmit torque, therefore wear is virtually eliminated.

EASY INSTALLATION WITH NO ADJUSTMENTS


Units are provided pre-assembled to a specific torque range, so there is nothing to adjust.

NO CONTAMINATION

Units are sealed which prevents any particles from contaminating the machine, and also prevents contamination of the clutch by the machine environment.

MAGNETIC SLIP CLUTCH WITH SHAFT

SERIES 51-OPL

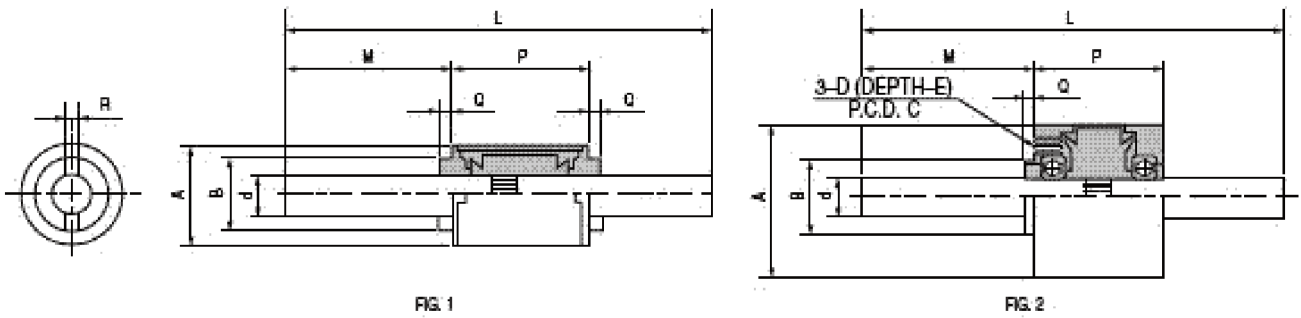


MODEL		Fig. 1 (Synthetic bearing)				Fig. 2 (Ball bearing)				
		0.3N	0.6N	1.2N	1.8N	13N	15N	23N	33N	48N
Static torque (Nm)		0.03	0.06	0.12	0.18	1.00	0.15	0.20	0.30	0.40
OPTIONAL TORQUE RANGE (Lbs. in)		.17~.35	.35~.53	.53~1.06	1.06~1.60	.62~.88	.88~1.33	1.33~1.76	1.76~2.66	2.66~3.52
MAX ALLOWABLE SPEED (r/min.)		300	300	250	200	400	400	300	300	200
SHAFT DIA. (mm) d-0.03		8	8	8	8	8	8	8	8	8
RADIAL DIMENSIONS (mm)	A	20	20	20	20	32	32	32	32	32
	B	15	15	15	15	15	15	15	15	15
	C	-	-	-	-	21	21	21	21	21
	D	-	-	-	-	M3	M3	M3	M3	M3
	E	-	-	-	-	5	5	5	5	5
AXIAL DIMENSIONS (mm)	L	180	180	180	180	180	180	180	180	180
	M	50	50	50	50	50	50	50	50	50
	P	20	20	27	34	26	26	33	33	40
	Q	2.5	2.5	2.5	2.5	2	2	2	2	2
	R	2.4	2.4	2.4	2.4	-	-	-	-	-

- * Weight will vary depending upon shaft length. For reference weight, see OPL-R
- * Where the slip clutch is subjected to any radial or axial thrust, we recommend the use of the ball bearing design shown in figure 2.
- * The configuration and shaft length of the slip clutch can be varied to suite particular application requirements.

MAGNETIC SLIP CLUTCH THROUGH BORE

SERIES 51-OPL-R

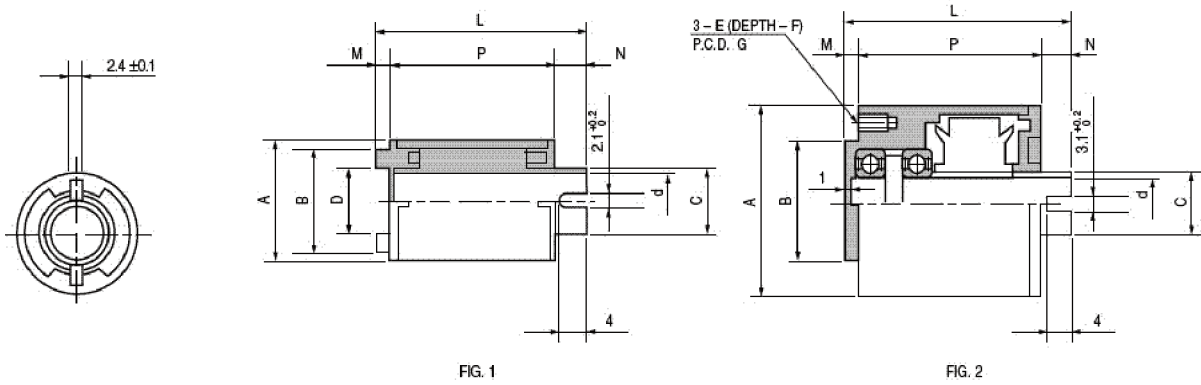

MODEL		Fig. 1 (Synthetic bearing)			Fig. 2 (Ball bearing)			
		0.3R	0.6R	1.2R	1 BR	1.5BR	2BR	3BR
STATIC TORQUE		0.03	0.06	0.12	1.0	0.15	0.20	0.30
OPTIONAL TORQUE RANGE (Nm. in)		0.019-0.039	0.039-0.059	0.059-0.119	0.069-0.099	0.099-0.14	0.14-0.197	0.197-0.299
MAX ALLOWABLE SPEED (r/min.)		300	300	250	400	400	300	300
SHAFT DIA. (mm) d-0.03		-	-	-	-	-	-	-
RADIAL DIMENSIONS (mm)	A	20	20	20	32	32	32	32
	B	17	17	17	20h8	20h8	20h8	20h8
	C	11	11	11	10	10	10	10
	D	11	11	11	-	-	-	-
	E	-	-	-	M3	M3	M3	M3
	F	-	-	-	5	5	5	5
	G	-	-	-	26+/-0.2	26+/-0.2	26+/-0.2	26+/-0.2
AXIAL DIMENSIONS (mm)	L	27.5	27.5	34.5	37	37	44	44
	M	2.5	2.5	2.5	2	2	2	2
	N	5	5	5	5	5	5	5
	P	20	20	27	30	30	37	37
Unit Weight (Kg)		0.025	0.025	0.030	0.12	0.12	0.15	0.15

*Where the slip clutch is subjected to any radial or axial thrust, we recommend the use of the ball bearing design shown in figure 2.