


T IS THE EARTH TERMINAL.

Dimensions in mm.

FEATURES CARATTERISTICHE		103 - 8932 - 6451 (103 - 8932 - 6421)
MODEL MODELLO		
BASIC STEP ANGLE		1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)	12.7 ^(*)
UNIPOLAR CURRENT	(Amp)	9
RESISTANCE	(Ohm)	0.28
INDUCTANCE	(mH)	2.4
BIPOLAR HOLDING TORQUE	(Ncm)	1330
UNIPOLAR HOLDING TORQUE	(Ncm)	1020
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)	8000
THEORETICAL ACCELERATION	(rad x sec. ⁻²)	16500
BACK E.M.F.	(V/Krpm)	85
MASS	(Kg)	7
PROTECTION DEGREE		IP43
LEADS CODE		III

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

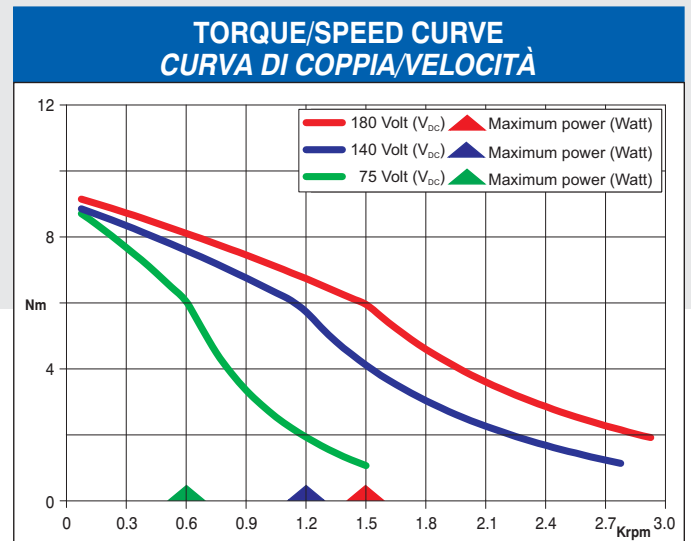

^(*) Bipolar parallel connection.
^(*) Collegamento bipolare parallelo.



Suggested driver: contact R.T.A.