


Dimensions in mm.

FEATURES CARATTERISTICHE		
MODEL MODELLO		103 - H7123 - 0440
BASIC STEP ANGLE		$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT	(Amp)	1.5 ^(*)
UNIPOLAR CURRENT	(Amp)	2
RESISTANCE	(Ohm)	1.6
INDUCTANCE	(mH)	3.8
BIPOLAR HOLDING TORQUE	(Ncm)	110
UNIPOLAR HOLDING TORQUE	(Ncm)	85
ROTOR INERTIA	(Kg $m^2 \times 10^{-7}$)	210
THEORETICAL ACCELERATION	(rad x sec. $^{-2}$)	50000
BACK E.M.F.	(V/Krpm)	31
MASS	(Kg)	0.65
LEADS CODE		IV



^(*) Bipolar series connection.
^(*) Collegamento bipolare serie.

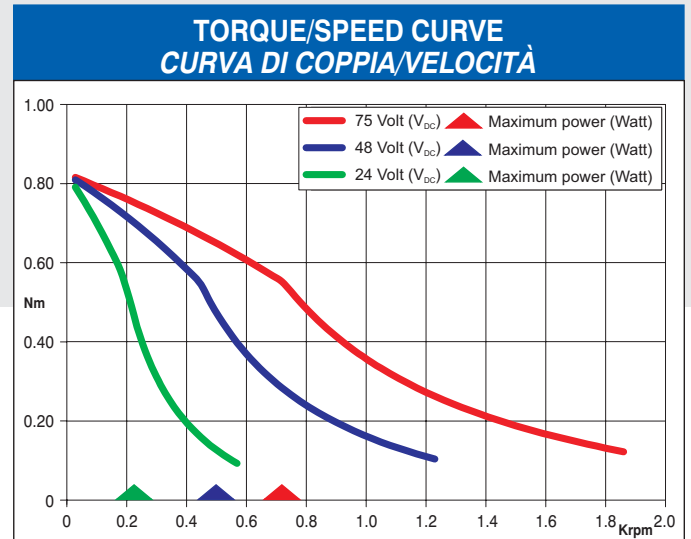

Suggested R.T.A. driver: CSD Series, NDC Series, HGD Series.