


Dimensions in mm.

FEATURES
CARATTERISTICHE

MODEL MODELLO	103 - H7126 - 0140	
BASIC STEP ANGLE		$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT	(Amp)	0.75 ^(*)
UNIPOLAR CURRENT	(Amp)	1
RESISTANCE	(Ohm)	8.6
INDUCTANCE	(mH)	19
BIPOLAR HOLDING TORQUE	(Ncm)	165
UNIPOLAR HOLDING TORQUE	(Ncm)	130
ROTOR INERTIA	(Kg $m^2 \times 10^{-7}$)	360
THEORETICAL ACCELERATION	(rad x sec. $^{-2}$)	45800
BACK E.M.F.	(V/Krpm)	92
MASS	(Kg)	1
LEADS CODE		IV

TORQUE/SPEED CURVE
CURVA DI COPPIA/VELOCITÀ

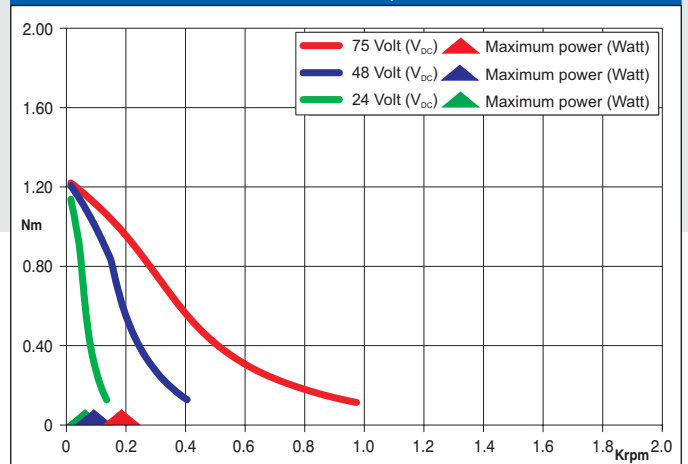

^(*) Bipolar series connection.
^(*) Collegamento bipolare serie.



Suggested R.T.A. driver: CSD Series, NDC Series, HGD Series.