


Dimensions in mm.

**FEATURES**  
**CARATTERISTICHE**

MODEL MODELLO	103 - H7126 - 0740 (103 - H7126 - 0710)	
BASIC STEP ANGLE	$1.8^\circ \pm 0.09^\circ$	
BIPOLAR CURRENT	(Amp)	2.2 <sup>(*)</sup>
UNIPOLAR CURRENT	(Amp)	3
RESISTANCE	(Ohm)	0.9
INDUCTANCE	(mH)	2.2
BIPOLAR HOLDING TORQUE	(Ncm)	165
UNIPOLAR HOLDING TORQUE	(Ncm)	130
ROTOR INERTIA	(Kg $m^2 \times 10^{-7}$ )	360
THEORETICAL ACCELERATION	(rad x sec. $^{-2}$ )	45800
BACK E.M.F.	(V/Krpm)	31
MASS	(Kg)	1
LEADS CODE	IV	

Codes between brackets refer to double shaft models.  
Le sigle fra parentesi si riferiscono ai modelli bialbero.

**TORQUE/SPEED CURVE**  
**CURVA DI COPPIA/VELOCITÀ**

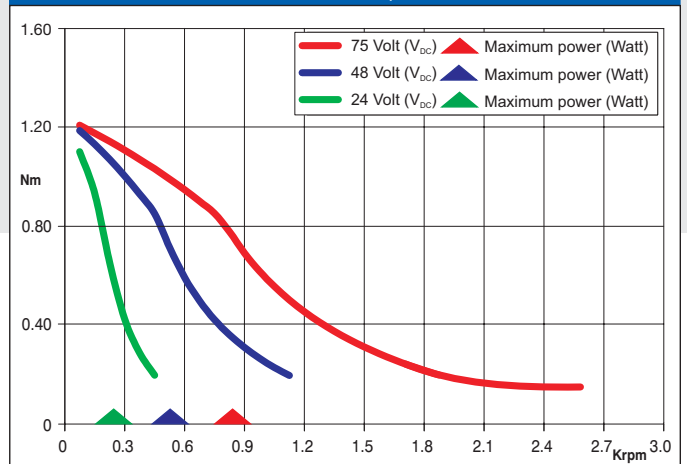

<sup>(\*)</sup> Bipolar series connection.  
<sup>(\*)</sup> Collegamento bipolare serie.



Suggested R.T.A. driver: CSD Series, NDC Series, HGD Series.