


Dimensions in mm.

**FEATURES**  
**CARATTERISTICHE**

| MODEL<br>MODELLO         | 103 - H7126 - 1740<br>(103 - H7126 - 1710)      |       |
|--------------------------|---|-------|
| BASIC STEP ANGLE         | $1.8^\circ \pm 0.09^\circ$                      |       |
| BIPOLAR CURRENT          | (Amp)   | 4     |
| UNIPOLAR CURRENT         | (Amp)   |       |
| RESISTANCE               | (Ohm)   | 0.48  |
| INDUCTANCE               | (mH)  | 2.2   |
| BIPOLAR HOLDING TORQUE   | (Ncm)   | 165   |
| UNIPOLAR HOLDING TORQUE  | (Ncm)   |       |
| ROTOR INERTIA            | ( $\text{Kg} \cdot \text{m}^2 \times 10^{-7}$ ) | 360   |
| THEORETICAL ACCELERATION | ( $\text{rad} \times \text{sec.}^{-2}$ )        | 45800 |
| BACK E.M.F.              | (V/Krpm)  | 31    |
| MASS                     | (Kg)  | 1     |
| LEADS CODE               | V   |       |

Codes between brackets refer to double shaft models.  
Le sigle fra parentesi si riferiscono ai modelli bialbero.

**TORQUE/SPEED CURVE**  
**CURVA DI COPPIA/VELOCITÀ**

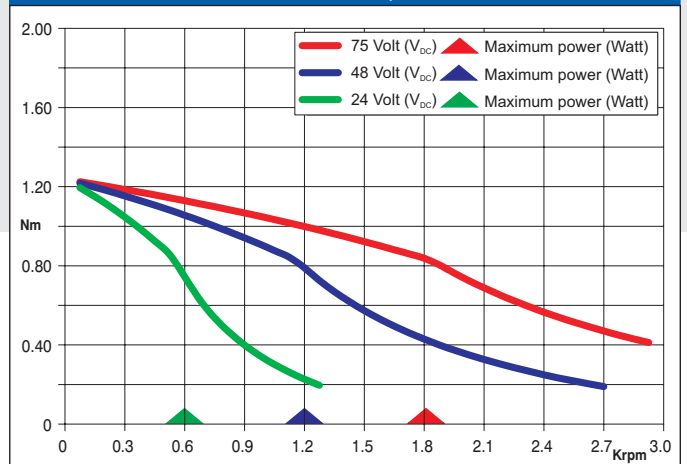

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)



**Suggested R.T.A. driver: CSD Series, NDC Series, HGD Series, PLUS Series.**