


T IS THE EARTH TERMINAL.

Dimensions in mm.

FEATURES CARATTERISTICHE		
MODEL MODELLO		103 - H7126 - 6640 (103 - H7126 - 6610)
BASIC STEP ANGLE		1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)	5.6
UNIPOLAR CURRENT	(Amp)	
RESISTANCE	(Ohm)	0.3
INDUCTANCE	(mH)	0.85
BIPOLAR HOLDING TORQUE	(Ncm)	165
UNIPOLAR HOLDING TORQUE	(Ncm)	
ROTOR INERTIA	(Kgm <sup>2</sup> x 10 <sup>-7</sup> )	360
THEORETICAL ACCELERATION	(rad x sec. <sup>-2</sup> )	45800
BACK E.M.F.	(V/Krpm)	23
MASS	(Kg)	1
PROTECTION DEGREE		IP43
LEADS CODE		V

Codes between brackets refer to double shaft models.  
Le sigle fra parentesi si riferiscono ai modelli bialbero.

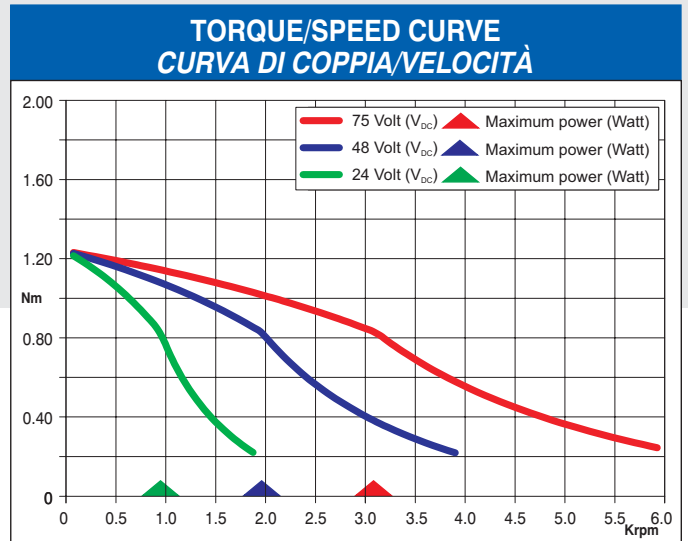

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)



Suggested R.T.A. driver: NDC Series, HGD Series, PLUS Series.