


WIRES ARE HOUSED IN A VINYL TUBE.
T IS THE EARTH TERMINAL.

Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - H8221 - 6241 (103 - H8221 - 6211)
BASIC STEP ANGLE			1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)		6
UNIPOLAR CURRENT	(Amp)		
RESISTANCE	(Ohm)		0.3
INDUCTANCE	(mH)		1.65
BIPOLAR HOLDING TORQUE	(Ncm)		300
UNIPOLAR HOLDING TORQUE	(Ncm)		
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)		1450
THEORETICAL ACCELERATION	(rad x sec. ⁻²)		20600
BACK E.M.F.	(V/Krpm)		50
MASS	(Kg)		1.5
PROTECTION DEGREE			IP43
LEADS CODE			V

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

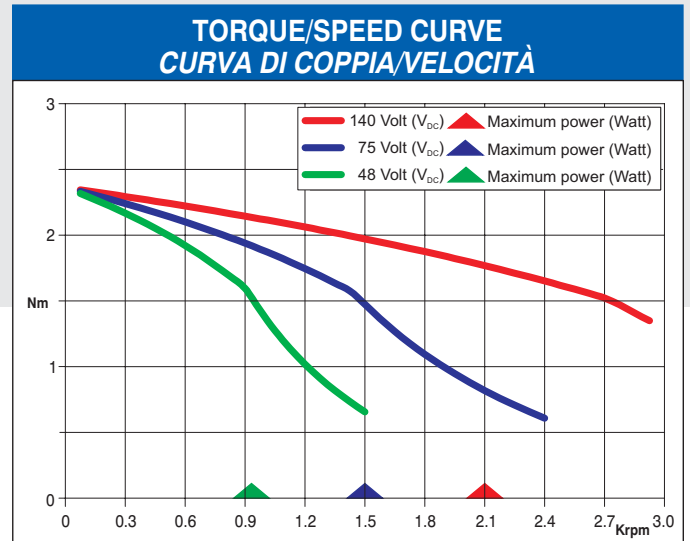

Suggested R.T.A. driver: NDC Series, HGD Series, PLUS Series.