


Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - H8221 - 62S41
BASIC STEP ANGLE			$1.8^\circ \pm 0.09^\circ$
BIPOLAR CURRENT	(Amp)		6
UNIPOLAR CURRENT	(Amp)		
RESISTANCE	(Ohm)		0.3
INDUCTANCE	(mH)		1.65
BIPOLAR HOLDING TORQUE	(Ncm)		300
UNIPOLAR HOLDING TORQUE	(Ncm)		
ROTOR INERTIA	(Kg $m^2 \times 10^{-7}$ )		1450
THEORETICAL ACCELERATION	(rad x sec. $^{-2}$ )		20600
BACK E.M.F.	(V/Krpm)		50
MASS	(Kg)		1.75
PROTECTION DEGREE			IP55
LEADS CODE			V



R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)

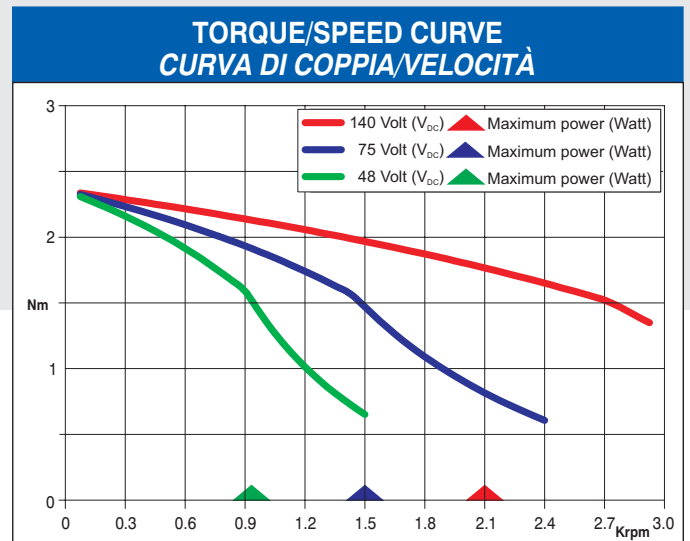

Suggested R.T.A. driver: NDC Series, HGD Series, PLUS Series.