



WIRES ARE HOUSED IN A VINYL TUBE.
T IS THE EARTH TERMINAL.

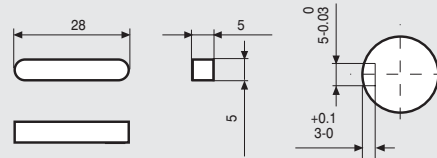


Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - H89222 - 6341
BASIC STEP ANGLE			1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)		6
UNIPOLAR CURRENT	(Amp)		
RESISTANCE	(Ohm)		0.45
INDUCTANCE	(mH)		5.4
BIPOLAR HOLDING TORQUE	(Ncm)		1620
UNIPOLAR HOLDING TORQUE	(Ncm)		
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)		14650
THEORETICAL ACCELERATION	(rad x sec. ⁻²)		11100
BACK E.M.F.	(V/Krpm)		270
MASS	(Kg)		7
PROTECTION DEGREE			IP43
LEADS CODE			V

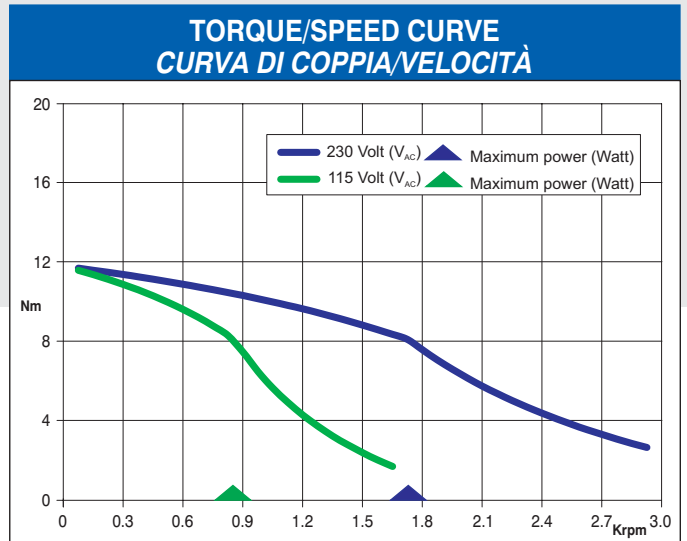

R.T.A. s.r.l. PAVIA (ITALY) SANYO DENKI CO., Ltd (JAPAN)

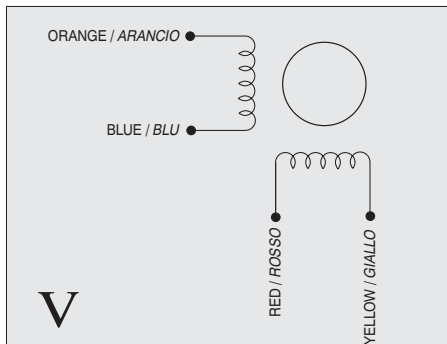

Suggested R.T.A. driver: PLUS Series, X-MIND Series.