


WIRES ARE HOUSED IN A VINYL TUBE.  
T IS THE EARTH TERMINAL.

Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - H89222 - 6541
BASIC STEP ANGLE			1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)		10
UNIPOLAR CURRENT	(Amp)		
RESISTANCE	(Ohm)		0.16
INDUCTANCE	(mH)		1.9
BIPOLAR HOLDING TORQUE	(Ncm)		1620
UNIPOLAR HOLDING TORQUE	(Ncm)		
ROTOR INERTIA	(Kg <sup>m</sup> 2 x 10 <sup>-7</sup> )		14650
THEORETICAL ACCELERATION	(rad x sec. <sup>-2</sup> )		11100
BACK E.M.F.	(V/Krpm)		162
MASS	(Kg)		7
PROTECTION DEGREE			IP43
LEADS CODE			V

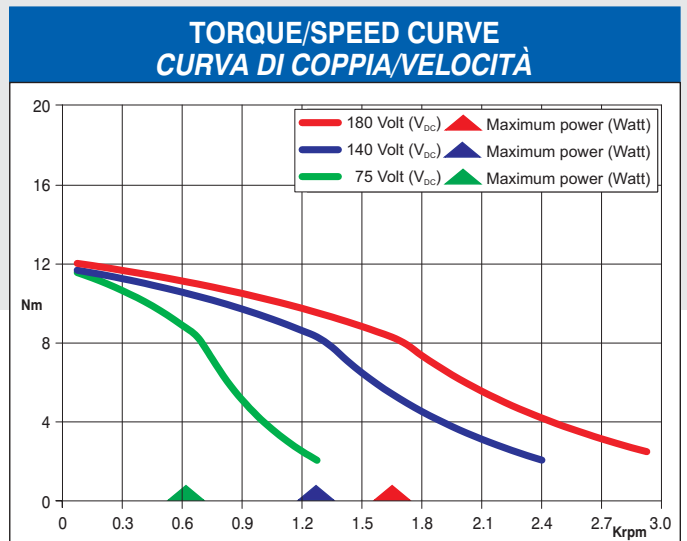

Suggested driver: contact R.T.A.