


MOTOR CONNECTOR IS JST mod. EHR-4/
EHR-6 A 4 / 6 POLES FEMALE.
FOR CONNECTION USE JST mod. B4B-EH-A/
B6B-EH-A MALE CONNECTOR.

Dimensions in mm.

FEATURES CARATTERISTICHE		MODEL MODELLO	103 - 547 - 52500 (103 - 547 - 52300)
BASIC STEP ANGLE			1.8° ± 0.09°
BIPOLAR CURRENT	(Amp)		0.7 ^(*)
UNIPOLAR CURRENT	(Amp)		1.0
RESISTANCE	(Ohm)		3.15
INDUCTANCE	(mH)		3
BIPOLAR HOLDING TORQUE	(Ncm)		25
UNIPOLAR HOLDING TORQUE	(Ncm)		19
ROTOR INERTIA	(Kgm ² x 10 ⁻⁷)		43
THEORETICAL ACCELERATION	(rad x sec. ⁻²)		59000
BACK E.M.F.	(V/Krpm)		14
MASS	(Kg)		0.24
LEADS CODE			IV

Codes between brackets refer to double shaft models.
Le sigle fra parentesi si riferiscono ai modelli bialbero.

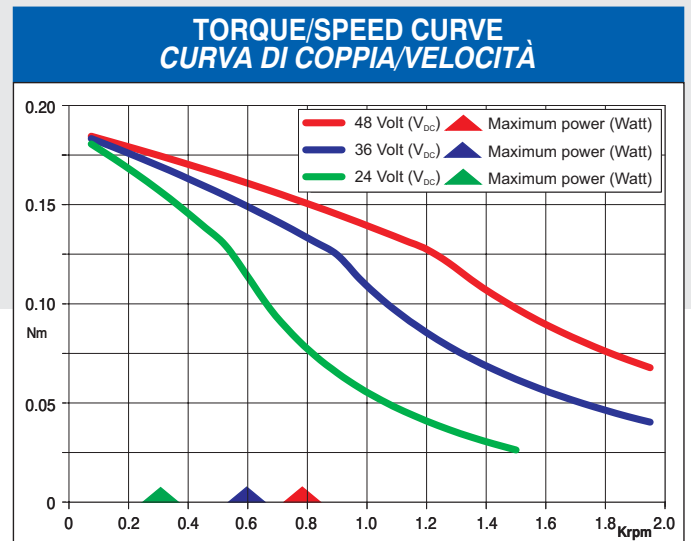

^(*) Bipolar series connection.
^(*) Collegamento bipolare serie.



Suggested driver: contact R.T.A.